









EXCLUSIVE MODELS


# Present-In







## COMMELIER PRESENT-IN





Refrigerated flush-wall cabinet at positive temperature (+ 4 °C) / molded heat-insulated tank made of ecological polyurethane coated with AISI 304 s/s / ceiling system with fan ventilated refrigeration system on all display levels / automatic defrost / remote hermetic condensing unit / digital control panel integrated in the door frame / 'zero' flush doors with mirror screen printing / bottom trays in mirrored glass / back and internal sides in mirrored glass with magnetic hook / glass shelves adjustable on rack rod / indirect lighting incorporated on the door frame with no spot 3000 °K strip-led / tubular steel base with height adjustable feet

-  +4 °C (+39,2 °F)
-  Deck Shelves
-  Ventilated
-  Automatic / electrical
-  R452A
-  N. 4 / H.R. 55 %  
30 °C (86 °F)
-  1 / Hermetic
-  230V/ 1 ph  
50 Hz



EXTERNAL

	<p><b>830</b></p> <p>Max Power Cons. 1000/5,9 W/A Average CONS. 0,65 Kw/H Weight 190 Kg Cooling Power* 800 W Pipe Size (SUC/LIQ) 12/6 mm</p>
	<p><b>1552</b></p> <p>Max Power Cons. 1380/6,8 W/A Average CONS. 0,9 Kw/H Weight 250 Kg Cooling Power* 1400 W Pipe Size (SUC/LIQ) 14/8 mm</p>
	<p><b>2274</b></p> <p>Max Power Cons. 1900/10,0 W/A Average CONS. 1,3 Kw/H Weight 310 Kg Cooling Power* 1900 W Pipe Size (SUC/LIQ) 14/8 mm</p>
	<p><b>2969</b></p> <p>Max Power Cons. 2300/11,5 W/A Average CONS. 1,5 Kw/H Weight 400 Kg Cooling Power* 2400 W Pipe Size (SUC/LIQ) 16/8 mm</p>

	<p>EXTERNAL COOLING SYSTEM</p> <p><b>DKK 65.600</b> Ex. choice of shelfe solution</p>
	<p>EXTERNAL COOLING SYSTEM</p> <p><b>DKK 76.500</b> Ex. choice of shelfe solution</p>
	<p>EXTERNAL COOLING SYSTEM</p> <p><b>DKK 86.200</b> Ex. choice of shelfe solution</p>
	<p>EXTERNAL COOLING SYSTEM</p> <p><b>DKK 101.300</b> Ex. choice of shelfe solution</p>

\* to expansion temperature of -10 °C

All prices are ex. VAT, delivery and installation









EXCLUSIVE MODELS


# Present-In





## COMMELIER PRESENT-IN SLIDE



Refrigerated flush-wall cabinet at positive temperature (+ 4 °C) / molded heat-insulated tank made of ecological polyurethane coated with AISI 304 s/s / ceiling system with fan ventilated refrigeration system on all display levels / automatic defrost / remote hermetic condensing unit / digital central panel / coplanar sliding doors with soft closing system / bottom trays in mirrored glass / back and internal sides in mirrored glass with magnetic hook / glass shelves adjustable on rack rod / indirect lighting incorporated an the door frame with no spot 3000 °K strip-led / tubular steel base with height adjustable feet

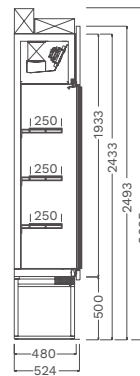-  +4 °C (+39,2 °F)
-  Deck Shelves
-  Ventilated
-  Automatic / electrical
-  R452A
-  N. 4 / H.R. 55 %  
30 °C (86 °F)
-  1 / Hermetic
-  230V/ 1 ph  
50 Hz



EXTERNAL

	<p><b>2274</b></p> <p>Max Power Cons. 2000/10,5 W/A</p> <p>Average CONS. 1,4 Kw/H</p> <p>Weight 350 Kg</p> <p>Cooling Power* 1900 W</p> <p>Pipe Size (SUC/LIQ) 16/8 mm</p>
	<p><b>2996</b></p> <p>Max Power Cons. 2800/14,9 W/A</p> <p>Average CONS. 1,9 Kw/H</p> <p>Weight 490 Kg</p> <p>Cooling Power* 3000 W</p> <p>Pipe Size (SUC/LIQ) 18/10 mm</p>

	<p>EXTERNAL COOLING SYSTEM</p> <p><b>DKK 115.000</b></p> <p>Ex. choice of shelfe solution</p>
	<p>EXTERNAL COOLING SYSTEM</p> <p><b>DKK 131.300</b></p> <p>Ex. choice of shelfe solution</p>

\* to expansion temperature of -10 °C

All prices are ex. VAT, delivery and installation